C9500-40X-E Datasheet

Get a Quote



Overview

C9500-40X-E is one of the the Cisco Catalyst 9500 Series Switches. The Cisco Catalyst 9500 Series Switches are the next generation of enterprise-class core and aggregation layer switches, supporting full programmability and serviceability. Based on an x86 CPU, the Catalyst 9500 Series is Cisco's lead purpose-built fixed core and aggregation enterprise switching platform, built for security, IoT, and cloud. The Catalyst 9500 Series is the industry's first purpose-built 40 Gigabit Ethernet line of switches targeted for the enterprise campus.


Quick Specs

Table 1 shows the Quick Specs.

Product Code	С9500-40Х-Е	
Description	Catalyst 9500 40-port 10Gig switch, Network Essentials	
Switching capacity	Up to 480 Gbps full duplex	
Forwarding rate	Up to 720 Mpps	
AC power max rating	950W	
System power consumption	850W max	
Dimensions (H x W x D)	mensions (H x W x D) 1.73 x 17.5 x 21.52 in	
Rack units (RU)	1 RU	

Product Details

Figure 2 shows the front panel of C9500-40X-E.

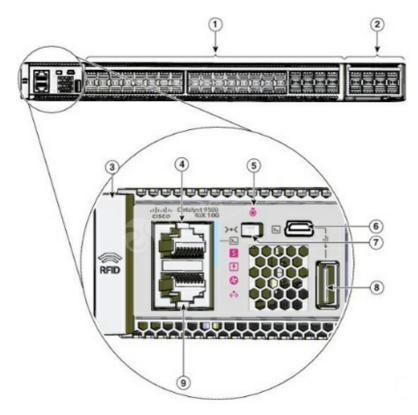

Note:

(2)	Network modules
(3)	RFID
(4)	Console port (RJ-45 Serial)
(5)	Blue beacon LED
(6)	USB mini Type B console port
(7)	Mode button
(8)	USB 2.0 host port
(9)	Ethernet management RJ-45 port

The Accessories

Table 2 shows the recommended elements for the C9500-40X-E.

Category	Model	Description
SOFTWARE SUBSCRIPTION	C9500-DNA-40X-E	C9500 DNA Essentials, Term licenses
Power Supply	PWR-C4-950WAC-R	950W AC Config 4 Power Supply front to back cooling
	PWR-C4-950WAC-R/2	950W AC Config 4 Power Supply front to back cooling
Console Cables	CAB-CONSOLE-RJ45	Cisco CAB-CONSOLE-RJ45 Console Cable 6ft with RJ45 and DB9F
	CAB-CONSOLE-USB	Cisco CAB-CONSOLE-USB Console Cable 6 ft with USB Type A and mini-B

Get more information

Do you have any question about the C9500-40X-E?

Contact us now via Live Chat or sales@router-switch.com.

Specification

C9500-40X-E specifications				
Performance specifications				
Switching capacity	Up to 480 Gbps full duplex			
Forwarding rate	Up to 720 Mpps			
Total number of MAC addresses	Up to 64,000*			
Total number of IPv4 routes (Address Resolution Protocol [ARP] plus learned routes)	Up to 64,000 indirect* Up to 32,000 host*			
Total number of IPv6 routes	Up to 32,000 indirect* Up to 16,000 host*			
Multicast scale	Up to 48,000*			
QoS ACL scale	Up to 18000*			
Security ACL scale	Up to 18000*			

FNF entries	Up to 512,000*		
DRAM	16 GB		
Flash	16 GB		
VLAN IDs	4000		
Total Switched Virtual Interfaces (SVIs)	4000		
Jumbo frame	9198 bytes		
Power supply specifications			
Power Supply Feature	Support in the Catalyst 9500 Series		
AC power max rating	950W		
System power consumption	850W max		
Input-voltage range and frequency	AC 115 to 230 VAC, 50 to 60 Hz		
Power supply efficiency	94%		
Total output BTU (Note: 1000 BTU/hr = 293W)	2901 BTU/hr (850W) max		
Input current	AC 10A at 115VAC, 5 A at 230VAC		
Output ratings	12V at 79A, 12V at 3A		
Output holdup time	AC = 10 ms at maximum load		
Power-supply input receptacles	AC IEC 60320 C16		
Power cord rating	AC 15A		
Dimensions, physical specifications, weight, and MTBF			

Description	Specifications
Dimensions (H x W x D)	1.73 x 17.5 x 21.52 in
Rack units (RU)	1 RU
Chassis with 2 power supplies and built-In fan	25.75 lb (11.68 kg)
Input voltage	90 to 264 VAC
Operating temperature	32°F to 104°F (0° to 40°C)
Storage temperature	-4° to 149°F (-20° to 65°C)
Relative humidity operating and nonoperating noncondensing	Ambient (noncondensing) operating: 5% to 90% Ambient (noncondensing) nonoperating and storage: 5% to 95%
Altitude	Operation up to 6000 ft
MTBF (hours)	180,640

Download Resource

Selection Decision

Cisco's New Switch Selection Decision 2018

- 🔁 Cisco Catalyst 9500 Switch Datasheet
- 🔁 Cisco Catalyst 9000 Switches Comparison: 9200 vs 9300 vs 9400 vs 9500

Transition Guide

- 🔁 Guide to Upgrade Cisco Access and Backbone Switch
- 🔁 Selecting Cisco Switches-Campus, Branch, Digital Building

Want to Buy

Order Now

Get a Quote

Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of Cisco, Huawei, HPE, Dell, Hikvision, Juniper, Fortinet, etc.







Inventory Available



50%-98% Off Global List Price 100% Safe Online Shopping

Contact Us

- Tel: +1-626-239-8066 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: sales@router-switch.com