EPSON INKJET DIGITAL LABEL PRESS

EPSON SUREPRESS L-4033A





GO DIGITAL AND BOOST YOUR BOTTOM LINE

C.OTIS JUIC 100% ORANGE JUIL Flavoured juice from natural in

The Epson SurePress L-4033A Inkjet Digital Label Press makes high quality short run printing easier and more efficient, streamlining your workflow and adding to your bottom line. Print quality is exceptionally high on a range of standard label substrates, with accurate, consistent colour reproduction for precise colour matching. The press is also extremely easy to operate and maintain, which saves you time and money.


800 ml

OTIS IUTCI ured juice from natural


150 ml

ENHANCE YOUR SHORT RUN LABEL PRINTING

With the Epson SurePress L-4033A, you're ready to handle all the short-run label printing your customers need. They'll appreciate the quick turnaround and high quality, and you'll benefit by being able to offer them more versatile printing solutions, for their product and promotional label requirements.

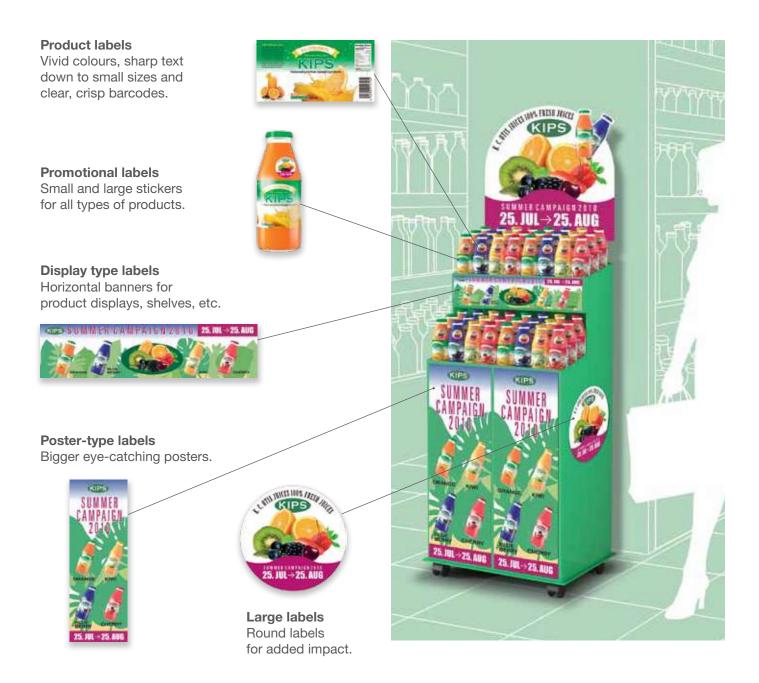

HIGH QUALITY, ACCURATE COLOUR PRINTING

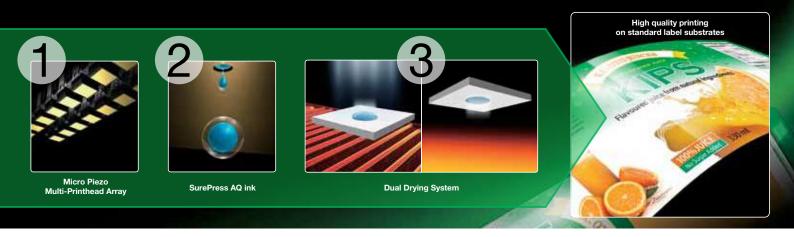

Epson SurePress AQ Ink

Epson has developed a new water-based pigment ink-set specifically for the Epson SurePress L-4033A with six colours including Green and Orange for an extra-wide colour gamut. It ensures accurate colour reproduction for precise colour matching, and provides excellent adhesion on a wide variety of standard label substrates, without the need for any pre-treatments or coatings.

Micro Piezo Multi-Printhead Array


Epson technology has created printheads with micro-fine nozzles that deliver perfectly accurate dot shapes and placement for each colour. This results in superior colour quality and sharp detail for barcodes and small text.




Micro Piezo Multi-Printhead Array

Variable-Sized Droplet Technology

Epson's Variable-Sized Droplet Technology produces different size ink droplets as small as 3.0 picoliters. These precisely sized droplets allow the ink to be uniformly applied, contributing to smooth gradations and accurate colours for optimum image quality.




Variable-Sized Droplet Technology





Dual Drying System


A unique two-stage drying process ensures optimum ink adhesion to label substrates. The first drying stage is a platen heater, which starts fixing the image onto the substrate. The substrate then moves down to the second drying stage, where hot air blown from a fan evaporates the remaining moisture. After drying, the substrate moves directly to the rewinder.

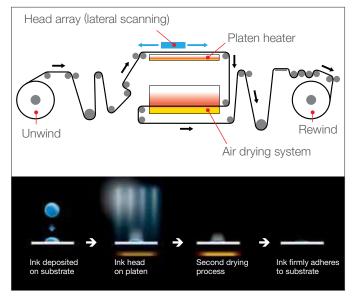

Epson's Dual Drying System ensures optimum ink adhesion

Expanded colour gamut

Epson inks are known for their wide colour gamut and accurate colour reproduction. Now with Green and Orange inks in addition to Cyan, Magenta, Yellow and Black, Epson expands the colour gamut for even higher accuracy and higher colour saturation. The difference is especially noticeable in the bright green to yellow and yellow-orange-red portions of the colour space. You will be able to match colours more accurately and the highly saturated colours will make labels look even more appealing.



CMYK vs Epson SurePress L-4033A



STREAMLINE YOUR PRODUCTION



Simplified set-up and operation

Unlike conventional presses that require long and complicated make-ready, Epson SurePress set-up is quick and easy. Maintenance requirements are minimal so there's less downtime. This all adds up to a faster, more efficient workflow, allowing you to handle a higher number of short-run jobs. Operating costs are low too, and you'll be using less substrates and energy. The result? Significantly higher profitability.

STEP STEP STEP STEP STEP 5 4 Design Finishing Inspection and **Pre-press** Printing deliverv Time consuming conventional workflow STEP 4 STEP 6 STEP STEP STEP STEP 5 STEP Design **Pre-press Plate preparation** Make-ready Printing Finishing Inspection and delivery

Fast & efficient digital workflow with Epson SurePress

User-friendly interface, touch-screen operation

The touch-screen panel is extremely simple to use with easy-to-understand interface that keep you in control of every aspect of printing. Job configuration can be quickly set and operating status can be readily checked at any time. Settings for specific types of jobs can be saved, so set-up is even faster the next time for repeat jobs.

Accurate colour management

Achieving accurate colour matching is extremely important, but requires expertise. The Epson SurePress L-4033A handles this task seamlessly, so you get precise colour rendering for each job, every time.





Easy maintenance

Save time and money with minimal maintenance requirements. The printing mechanism is easy to access and maintain, while ink replacement is quick and easy with no need to stop the press – simply replace the ink cartridges and continue printing.




ECO FEATURES

- Pre-treatment of substrates is not necessary.
- Epson SurePress AQ ink is water-based and has good adhesion on a wide variety of standard label substrates.
- Resource-saving, no use of chemicals, plates or films.
- Simple colour matching process reduces substrate wastage and ink consumption.
- Both the Epson SurePress L-4033A and Epson SurePress AQ Ink are in compliance with EU Directive RoHS (Restriction of Hazardous Substances).

PRODUCT SPECIFICATIONS

	r
PRINT TECHNOLOGY	Epson Micro Piezo™ inkjet technology
RESOLUTION	720×720 dpi, 720×1080 dpi, 720×1440 dpi (for paper), 720×1440 dpi (for film)
INK TYPE	SurePress AQ Inks
INK CARTRIDGES	Black, Matte Black, Cyan, Magenta, Yellow, Orange, Green, Over print liquid, Moisture liquid
WEB WIDTH	80mm to 330.2mm adjustable to support any width in this range
IMAGE SIZE	315.2 × 914.4mm maximum
PRINT SPEED	Up to 5 meters per minute at 720×720 dpi (on paper)
SUBSTRATE SUPPORT	Standard self-adhesive label substrates Semi-gloss, gloss and matte paper stock, BOPP, PET and Yupo
SUBSTRATE THICKNESS	100 to 320 microns
UNWINDER CAPACITY (Max.)	100kg weight / 1,000m length / 600mm diameter with 76mm inner core
NETWORK CONNECTIVITY	Ethernet 1,000 Base-T
DIMENSIONS OF PRESS (W×D×H)	3,788 × 1,767 × 1,828mm (Excluding Rewinder)
DIMENSIONS OF REWINDER (W×D×H)	1310 × 900 × 1,000mm
POWER REQUIREMENTS	Input voltage range: Rated voltage ±10% (180–220V) Rated voltage: AC (3 phases 3 lines) 200V

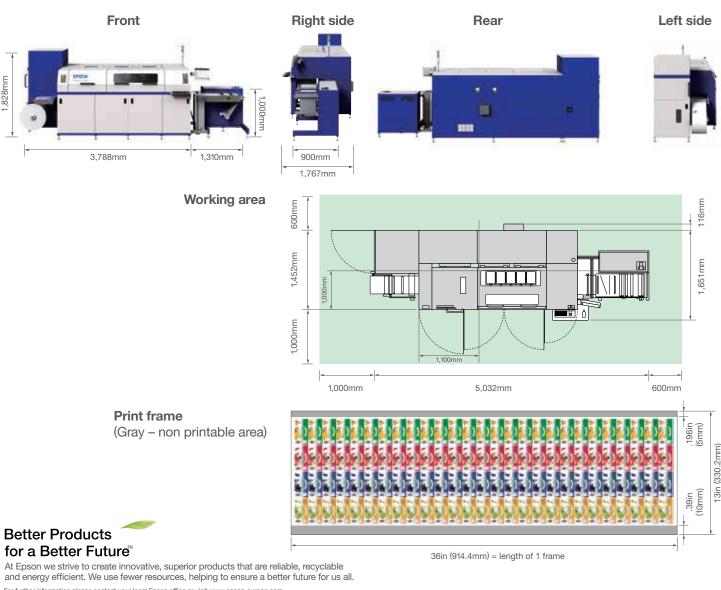

EPSON

For further information please contact your local Epson office or visit www.epson-europe.com

For further information please contact your local Epson office or visit www.epson-europe.com Austria 0810/200 11 3 (0,07 ć/min) Belgium 070/350120 (0,1735 ć/min) Czech 800/42 052 Denmark 44 50 85 85 Finland 0201 552 091 France 09 74 75 04 04 (Cost of local call, operator charges may apply) Germany 01805/23 41 10 (0,14 ć/min aus dem dt. Festnetz, Mobilfunkpreise abweichend. Ab 1.3.2010 Mobilfunkpreis max. 0,42 ć/min) Greece 210-8099499 Hungary 06800 147 83 Ireland 01 436 7742 Italy 02-660321 10 (0,12 ć/min) Luxembourg 900/43010 (0,24 ć/min) Middle East +9714 8818934 Netherlands 0900-5050808 (0.05 ć/oproep + 0.15 ć/min) Norway +47 67 11 37 00 Poland 0-0-800 4911299 (0,16 ż/min) Portugal 707 222 111 Russia (095) 777-03-55 Slovakia 0850 111 429 South Africa (+2211) 465-9621 Spain 93 582 15 00 Sweden 0771-440135 (Mobilsmtal – 0,98 kr/min, Lokala samtal – 0,30 kr/min, Utlandssamtal – 0,89 kr/min) Switzerland 0848 448820 (8 cent./min) Turkey (0212) 3360303 United Kingdom 0871 222 6702

Trademarks and registered trademarks are the property of Seiko Epson Corporation or their respective owners. Product information is subject to change without prior notice.

SurePress-1EN_INT_03/11

Epson