


AF Nikkor 20mm f/2.8D



 Click to enlarge

Click to view lens specs



Versatile ultra-wideangle lens for general photography

.....
1994 Release
.....



- [Sample Image](#)

Main Features

.....
.....

- Compact ultra-wideangle lens construction
- 94° (70° with Nikon DX format) picture coverage with edge-to-edge sharpness
- Close-Range Correction (CRC) system provides high performance at both near and far focusing distances

Back to top

Specifications

Lens construction	12 elements in 9 groups
Picture angle	94° [70° with Nikon digital cameras (Nikon DX format)]
Number of diaphragm blades	7
Minimum f/stop	22
Closest focusing distance	0.25m
Maximum reproduction ratio	1/8.3
Macro focusing	N/A
Focus-limit switch:	N/A
M/A mode	N/A
Focus lock button	N/A
Weight (approx.):	270g

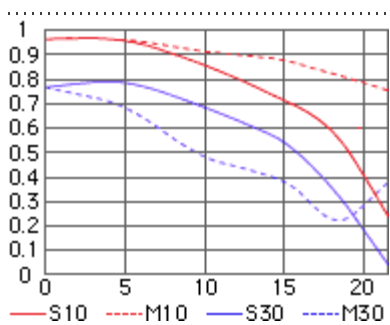
Dimensions (approx.) (from the camera's lens mounting flange)	69×42.5 mm
Lens cap	Snap-on
Lens hood	HB-4 (optional)
Lens case	CL-30S (optional)
Tripod collar	N/A
External front filter attachment frame	Does not rotate
External front filter	62mm
Slip-on filter	N/A
Built-in/rear filter	N/A
Circular polarizing filter	N/A
Circular polarizing filter II	N/A
AF-3	Usable, but vignetting may occur at ∞ (infinity) and macro settings. (0)
AF-4	Usable. (0): () Indicates maximum number of usable hoods (HN-36 for AF- 3/HN-37 for AF-4).





Infrared compensation scale	Does have
Supplied accessories	62mm Snap-on front lens cap, Rear lens cap LF-1
Aperture ring	Does have
Distance scale	Does have
Material of bayonet ring	Metal

Note:

[Back to top](#)

MTF Chart



Spatial Frequencies	S: Sagittal	M: Meridional
10 lines/mm		
30 lines/mm		

► [How to read the MTF chart](#)

[Back to top](#)

Lens Construction

