


AF Nikkor 24mm f/2.8D



**Superb wideangle
for landscapes or
candid**

.....
1993 Release
.....

 Click to enlarge

Click to view lens specs



- [Sample Image](#)

Main Features

.....

- Compact and lightweight
- Close-Range Correction (CRC) system provides high performance at both near and far focusing distances
- Nikon Super Integrated Coating for minimized flare and ghost, providing good color balance

Back to top

Specifications

Lens construction	9 elements in 9 groups
Picture angle	84° [61° with Nikon digital cameras (Nikon DX format)]
Number of diaphragm blades	7
Minimum f/stop	22
Closest focusing distance	0.3m
Maximum reproduction ratio	1/8.9
Macro focusing	N/A
Focus-limit switch:	N/A
M/A mode	N/A
Focus lock button	N/A
Weight (approx.):	270g
Dimensions (approx.) (from	64.5×46 mm

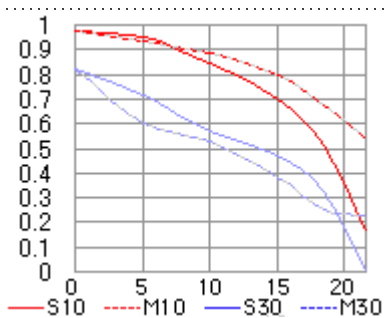
the camera's lens mounting flange)	
Lens cap	Snap-on
Lens hood	HN-1 (optional)
Lens case	CL-30S (optional)
Tripod collar	N/A
External front filter attachment frame	Does not rotate
External front filter	52mm
Slip-on filter	N/A
Built-in/rear filter	N/A
Circular polarizing filter	N/A
Circular polarizing filter II	Usable (except with the dedicated Lens Hood HN-1)
AF-3	Usable. (0)
AF-4	Usable. (1): () Indicates maximum number of usable hoods (HN-36 for AF-3/HN-37 for AF-4).
Infrared	Does have





compensation scale	
Supplied accessories	52mm Snap-on front lens cap, Rear lens cap LF-1
Aperture ring	Does have
Distance scale	Does have
Material of bayonet ring	Metal

Note:

[Back to top](#)

MTF Chart



Spatial Frequencies	S: Sagittal	M: Meridional
10 lines/mm		
30 lines/mm		

🔗 [How to read the MTF chart](#)

[Back to top](#)

Lens Construction

